

400 Series 403D-17 Industrial

23.6 kW / 31.6 hp @ 2400 rpm

26.1 kW / 35.0 hp @ 2600 rpm

The Perkins® 400D range has been developed in consultation with our marketplace. This 1.7 litre, 3 cylinder engine is a new product to the 400 Series product line-up. The 403D-17 increases a customer's choice and offers increased power with a minimal impact on package size. The 403D-17 also offers all the customer benefits they can experience from other products in the range.

The 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfil their needs in the construction, materials handling, agricultural/turf, genset and compressor markets, it is another class leading diesel range from Perkins.

Built to the most demanding standards, the 400D engines meet all the requirements of the off-highway emissions legislation for Stage IIIA and MLIT Step 4.

Long 500 hour service intervals, a two-year standard warranty, low noise and harshness, and a wide range of options make the 400 Series range the complete solution for compact power needs.

The 403D-17 is a very quiet 1.7 litre unit that delivers improved performance and reduced operating costs in a small, efficient package ideal for a range of off-highway applications.



Ultra-compact power

- Up to 26 kW (35 hp) from an engine envelope of 0.16 cubic metres (5.6 cubic feet)
- Coolant temperature of 112°C allows reduction in radiator size
- Oil and filter changes are 500 hours, dependent on load factor
- Engine durability and reliability, the warranty offering, and ease of installation combine to drive down the cost of ownership

Clean and quiet

- Noise levels have been kept to a minimum
- Subjective harshness has been carefully controlled making the engine sound even quieter

Durable power

- Product design and process improvements enhance both engine reliability and durability
- An improved governor and compliance testing delivering reliability of 6,000 hours
- A standard two-year warranty demonstrates our confidence in durability and reliability

Low operating costs

- Approved for operation on biodiesel* concentrations of up to 20%

Product support

- With highly trained Perkins distributors in thousands of communities in over 180 countries, you are never far away from expert product knowledge, genuine parts and a range of advanced diagnostic technology for keeping your engine in peak condition
- **Warranties and Service Contracts**
We provide one-year warranties for constant speed engines and two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally

Discover more
www.perkins.com
www.perkins.com/esc

www.perkins.com/distributor
To find your local distributor

Performance Data	Gross Intermittent (ISO/TR 14396)	Speed rpm
Power Output (kW)	26.1	2600
Power Output (hp)	35.0	2600
Peak Torque (Nm)	106.0	1800
Peak Torque (lbf-ft)	78.1	1800

Power output for a run-in engine after 60 hours.

*Subject to conformance with ASTM D6751 and EN14214.

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Publication No.PN1817/07/13 Produced in England ©2012 Perkins Engines Company Limited



 **Perkins®**

THE HEART OF EVERY GREAT MACHINE

400 Series 403D-17 Industrial

23.6 kW / 31.6 hp @ 2400 rpm

26.1 kW / 35.0 hp @ 2600 rpm

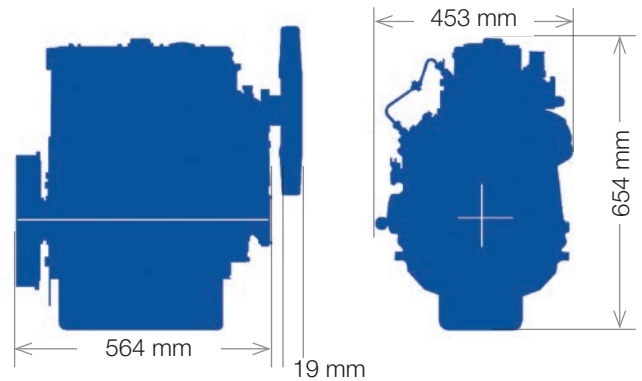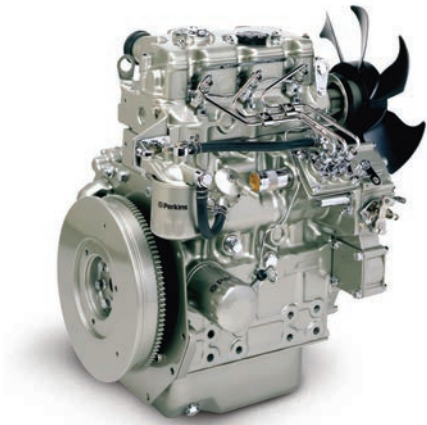

Engine Specification

- Cast iron engine block
- Flywheel and flywheel housing
- CTD fuel injection pump
- Spin on fuel filter
- Glow plug starting aid
- Lub oil sump
- Spin on lub oil filter
- Inlet manifold
- Cast iron exhaust manifold – side outlet
- Coolant pump belt driven
- Choice of cooling fans
- Starter motor 12 volt and 24 volt
- Alternator 12 volt and 24 volt
- ESOS (Electric shut-off solenoid)
- Lub oil pressure switch
- Coolant temperature switch
- SAE A PTO
- Cold start to -20°C (aided)


Option groups

A selection of optional items is available to enable you to prepare a specification precisely matched to your needs.

Emissions statement

Industrial and IOPU Engines: Certified against the requirements of EU Stage IIIA (Directives 97/68/EC as last amended, and 2004/26/EC, as last amended).

Constant Speed engines for use in Industrial, IOPU and ElectropaK applications: Certified against the requirements of EU Stage IIIA (Directive 97/68/EC, as last amended for mobile applications).

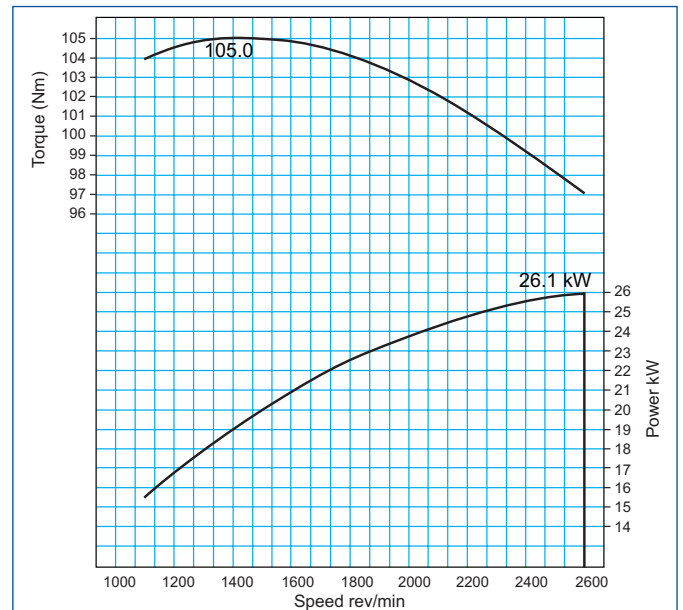

Engine data

Number of cylinders 3 in-line
 Bore and stroke 84 x 100 mm (3.3 x 3.9 in)
 Displacement 1.662 litres (101.4 in³)
 Aspiration Naturally aspirated
 Cycle 4 stroke
 Combustion system Indirect injection
 Compression ratio 23:1
 Rotation Anti-clockwise viewed on flywheel
 Cooling system Liquid
 Total lubrication capacity 6 litres (1.6 US gals)
 Total coolant capacity 2.5 litres (0.6 US gals)

Dimensions

Length 564 mm (22.2 in)
 Width 453 mm (18.3 in)
 Height 654 mm (25.7 in)
 Dry weight 160 kg (353 lb)

Final weight and dimensions will depend on completed specification.

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.
 Publication No. PN1817/07/13 Produced in England ©2012
 Perkins Engines Company Limited

Perkins Engines Company Limited

Peterborough PE1 5FQ
 United Kingdom
 Telephone +44 (0)1733 583000
 Fax +44 (0)1733 582240
www.perkins.com



THE HEART OF EVERY GREAT MACHINE