

400 Series 404D-22TA Industrial


49.3 kW / 66 hp @ 2800 rpm

The Perkins 400D range has been developed in consultation with our marketplace. This 2.2 litre, 4 cylinder, turbocharged, air charge cooled engine is a new product to the 400 Series product line-up. The 404D-22TA becomes the flagship model in the range offering an increase in the power available from this compact, lightweight range of engines whilst maintaining all the customer benefits they can experience from other products in the range.

The 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfil their needs in the construction, materials handling, agricultural/turf, genset and compressor markets, it is another class leading diesel range from Perkins.

Long 500 hour service intervals, a two-year standard warranty, low noise and harshness, and a wide range of options make the 400 Series range the complete solution for compact power needs.

The 404D-22TA is a powerful but quiet 2.2 litre turbocharged unit delivering impressive performance with low operating costs in a small efficient package ideal for a range of off-highway applications.

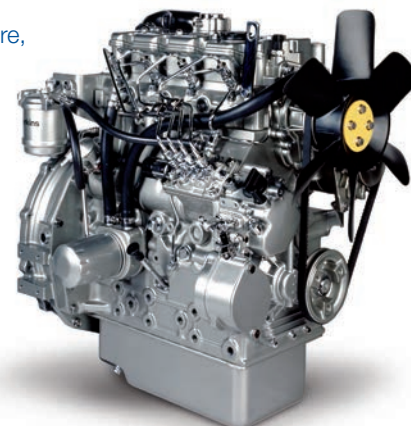

Ultra-compact power

- The neatly installed side mounted turbocharger position provides additional power with minimum impact on package size making fitment into machines easier

Clean and quiet

- Noise levels have been kept to a minimum
- Subjective harshness has been carefully controlled making the engine sound even quieter

Durable power

- Product design and process improvements enhance both engine reliability and durability
- An improved governor and new compliance testing deliver reliability of 6,000 hours
- A standard two-year warranty demonstrates our confidence in durability and reliability

Low operating costs

- Approved for operation on biodiesel* concentrations of up to 20%
- Oil and filter changes are 500 hours, dependent on load factor
- Engine durability and reliability, the warranty offering, and ease of installation combine to drive down the cost of ownership

Product support

- With highly trained Perkins distributors in thousands of communities in over 180 countries, you are never far away from expert product knowledge, genuine parts and a range of advanced diagnostic technology for keeping your engine in peak condition

- Warranties and Service Contracts

We provide one-year warranties for constant speed engines and two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally

[Discover more](#)

www.perkins.com

www.perkins.com/esc

www.perkins.com/distributor

[To find your local distributor](#)

Performance Data	Gross Power	Speed rpm
Power Output (kW)	49.3	2800
Power Output (hp)	66.0	2800
Peak Torque (Nm)	208.4	1800
Peak Torque (lbf·ft)	153.7	1800

Power output for a run-in engine after 60 hours.

*Subject to conformance with ASTM D6751 and EN14214.

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.


Publication No.PN1821/07/13 Produced in England ©2012 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

400 Series 404D-22TA Industrial

49.3 kW / 66 hp @ 2800 rpm

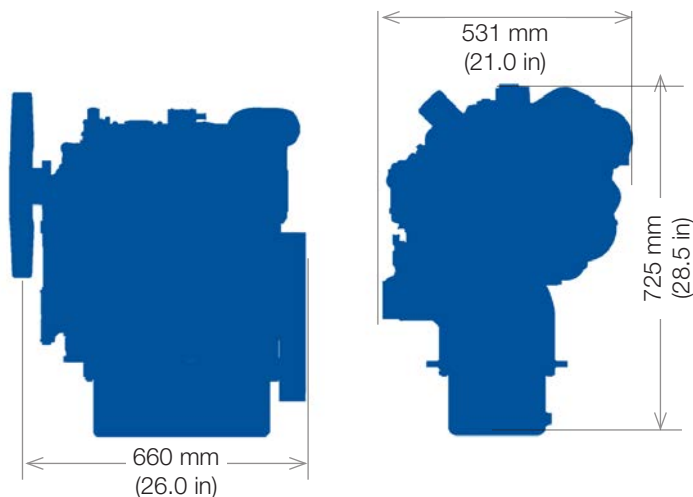


Engine specification

- Cast iron engine block
- Flywheel and flywheel housing
- Fuel injection pump
- Flywheel and flywheel housing
- Fuel injection pump
- Glow plug starting aid
- Lub oil sump
- Spin on lub oil filter
- Inlet manifold
- Cast iron exhaust manifold – side outlet
- Coolant pump belt driven
- Choice of cooling fans
- Starter motor 12 volt and 24 volt
- Alternator 12 volt and 6.5 amp
- ESOS (Electric shut-off solenoid)
- Lub oil pressure switch
- Coolant temperature switch
- SAE A PTO
- High and low fan positions
- Electronic controlled governing as an option

Option groups

A selection of optional items is available to enable you to prepare a specification precisely matched to your needs.

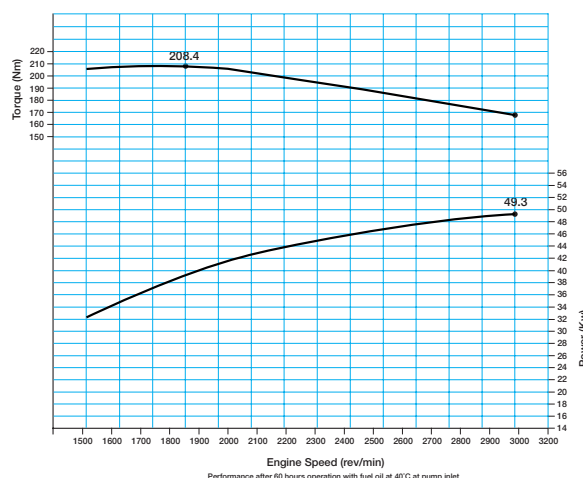

Lower speed ratings may not be read from this curve.

Engine data

Number of cylinders	4 in-line
Bore and stroke.....	84 x 100 mm (3.3 x 3.9 in)
Displacement	2.2 litres (135 cubic in)
Aspiration	Turbocharged
Cycle.....	4 stroke
Combustion system.....	Indirect injection
Compression ratio	23:3:1
Rotation.....	Anti-clockwise viewed on flywheel
Cooling system.....	Liquid
Total lubrication capacity.....	10.6 litres (2.8 US gals)
Total coolant capacity	3.6 litres (1.0 US gals)
Dimensions	
Length	660 mm (26.0 in)
Width.....	531 mm (21.0 in)
Height.....	725 mm (28.5 in)
Dry weight	194 kg (428 lb)

Final weight and dimensions will depend on completed specification.

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.
 Publication No.PN1821/07/13 Produced in England ©2012
 Perkins Engines Company Limited

Perkins Engines Company Limited

Peterborough PE1 5FQ
 United Kingdom
 Telephone +44 (0)1733 583000
 Fax +44 (0)1733 582240
www.perkins.com



THE HEART OF EVERY GREAT MACHINE