

850 Series 854E-E34TA Industrial Open Power Unit

EU Stage IIIB, EPA Tier 4 Interim
66-74.5 kW / 88-100 hp

Building on its already strong EU Stage IIIB and EPA Tier 4 industrial range, Perkins is pleased to announce the continuing expansion of the 850 Series to include the new Industrial Open Power Units (IOPUs).

Perkins IOPUs are industry leaders in flexibility, offering a wide choice of options to the customer. The whole unit has been built around the demands of our customers and as such offers a great package with a simple integration design.

At the higher power range is the 854E-E34TA IOPU, turbocharged, air-to-air charge cooled, 3.4 litre, 4 cylinder unit capable of producing 74.5 kW (100 hp). Its high power density, combined with excellent torque, enables the machine manufacturers to select this engine where previously they may have used an engine of higher cubic capacity. This downsizing creates more space to package the new aftertreatment unit, resulting in minimal installation impact for our customers.

The IOPUs are designed to be productive and have a new range of power ratings to ensure the customer maximises their profitability.

Perkins have developed a reputation for designing and building reliable and durable engines suitable for the most demanding applications.

Engine data

Number of cylinders	4 vertical in-line
Bore and stroke	99 mm x 110 mm (3.9 in x 4.3 in)
Displacement	3.4 litres (207.5 in ³)
Aspiration	Turbocharged aftercooled
Cycle	4 stroke
Combustion system.....	Direct injection
Compression ratio	17:1
Rotation.....	Anti-clockwise, viewed on flywheel
Cooling system.....	Liquid
Total coolant capacity	16 litres (4.2 US gal)
Dimensions – engine mounted aftertreatment, axially along head	
Length	1252 mm (49.3 in)
Width.....	705 mm (27.7 in)
Height.....	1033 mm (40.7 in)
Dimensions – engine mounted aftertreatment, transverse across flywheel housing	
Length	1242 mm (48.9 in)
Width.....	705 mm (27.7 in)
Height.....	957 mm (37.6 in)
Dry weight	407 kg (897 lbs)


Final weight and dimensions will depend on completed specification

Emissions

Designed to meet 2012 EU Stage IIIB (Europe), EPA Tier 4 (US) emission requirements.

Reliable, quiet, and durable power

World-class manufacturing capability and processes coupled with proven core engine designs assure reliability, quiet operation, and many hours of productive life.

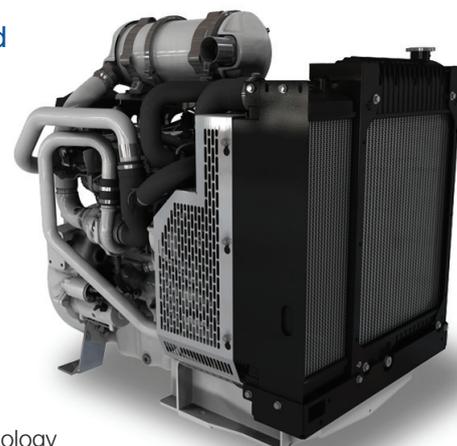

Innovative design

- Leading-edge technology of the 850 Series provides significant improvements in power, torque, fuel consumption and response.
- Turbocharging – single smart wastegated turbo systems.
- Durable high pressure common rail technology.
- Centrifugal service-free filter, closed circuit breathing system.

Fuel economy

Fuel consumption optimised to match operating cycles of a wide range of equipment and applications. No additional fluids or additives are required, which lowers operating costs.

Low cost of ownership

- Excellent fuel consumption.
- Hydraulic tappets allow service-free top end.
- Multi-vee belts for longer service intervals.
- 500 hour oil change intervals.

Product support excellence

- Perkins recognise that the customer relationship is important to machine manufacturers and we can offer a range of flexible solutions to help provide appropriate support, either to the OEMs' network or directly to the machine customer.
- Perkins' information systems enable our distributors to quickly diagnose engine faults and identify the right parts. The Perkins logistics operation is able to dispatch more than 45,000 different parts from stock, reaching the customer within 24 hours.
- Extended Service Contracts:
 - No surprises – Total protection from unexpected repair costs (parts, labour and travel)
 - Enjoy longer lasting product support from Perkins global network
 - Genuine Perkins parts ensure continued engine performance
 - Highly trained technicians carry out all repairs
 - Transferable coverage should you sell your machine.

850 Series 854E-E34TA Industrial Open Power Unit

EU Stage IIIB, EPA Tier 4 Interim
66-74.5 kW / 88-100 hp

Engine specification

Air inlet

- Standard air cleaners
- Air cleaner on flywheel-mounted aftertreatment

Control system

- Full electronic control system
- Fully integrated, engine-mounted engine control module
- All connectors and wiring looms waterproof and designed to withstand harsh off-highway environments
- Flexible and configurable software features and J1939 standard communications I/O

Standard emissions control equipment

- NRS – NOx Reduction System

Flywheels and flywheel housing

- SAE3 configuration

Fuel system

- Electronic high pressure common rail
- Engine-mounted fuel filters



Power take-off

- SAE A flange on left-hand side

Available options



- Balanced or unbalanced
- Pusher or puller fan
- Engine control panel
- Machine side wiring

Engine mounted after-treatment – axially along head

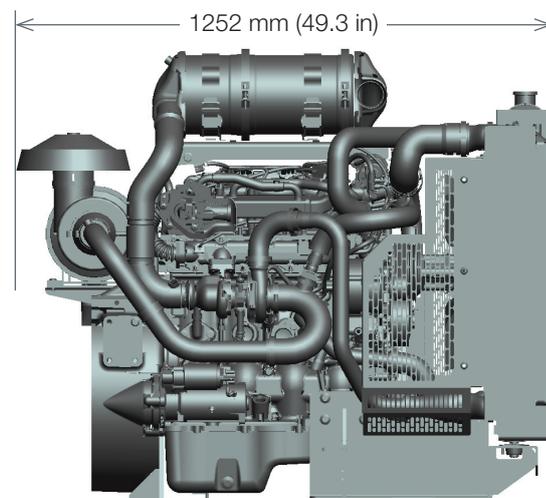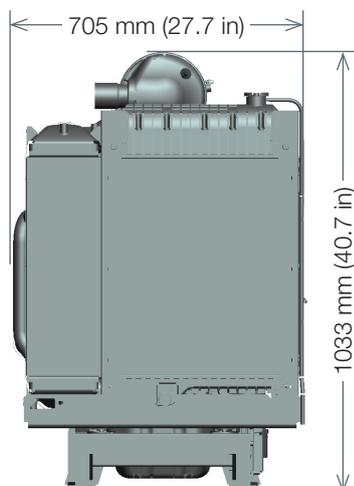

Final weight and dimensions will depend on completed specification

Engine mounted after-treatment – transverse across flywheel housing

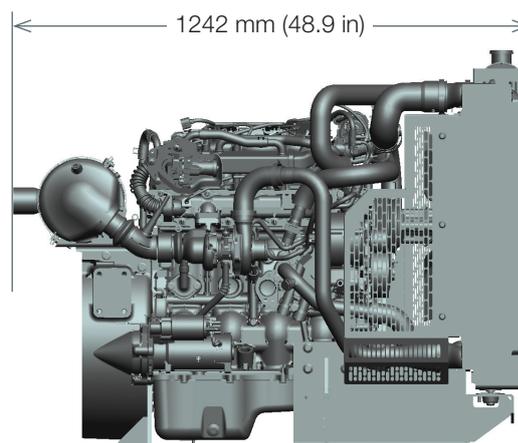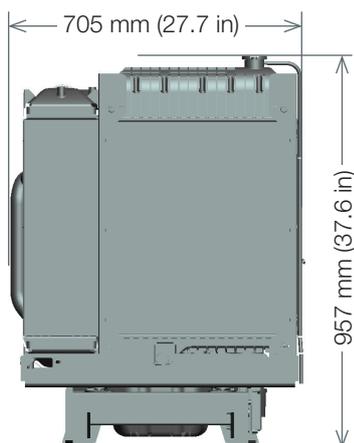

Final weight and dimensions will depend on completed specification

Engine control panel

Dimensions



Depth: 76 mm (3 in)
Width: 233 mm (9.2 in)
Height: 163 mm (6.4 in)
Weight: 1.7 kg (3.7 lb)



850 Series 854E-E34TA Industrial Open Power Unit

EU Stage IIIB, EPA Tier 4 Interim
66-74.5 kW / 88-100 hp

Performance data

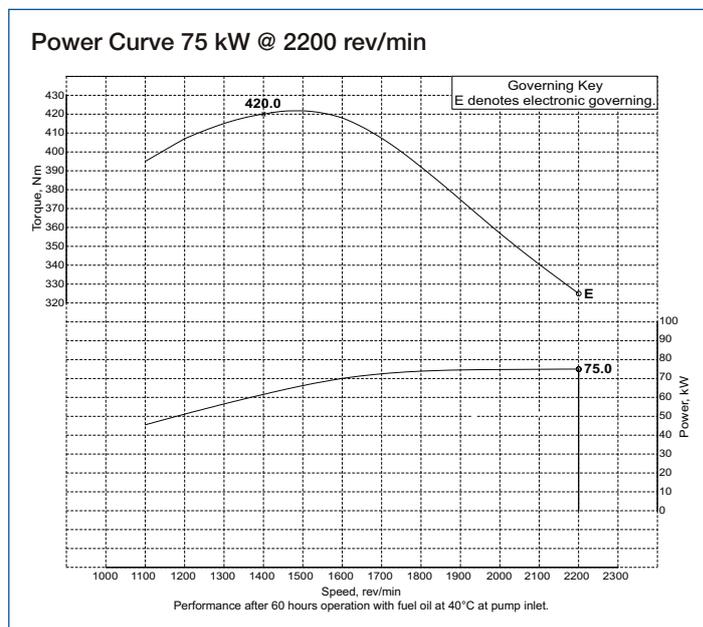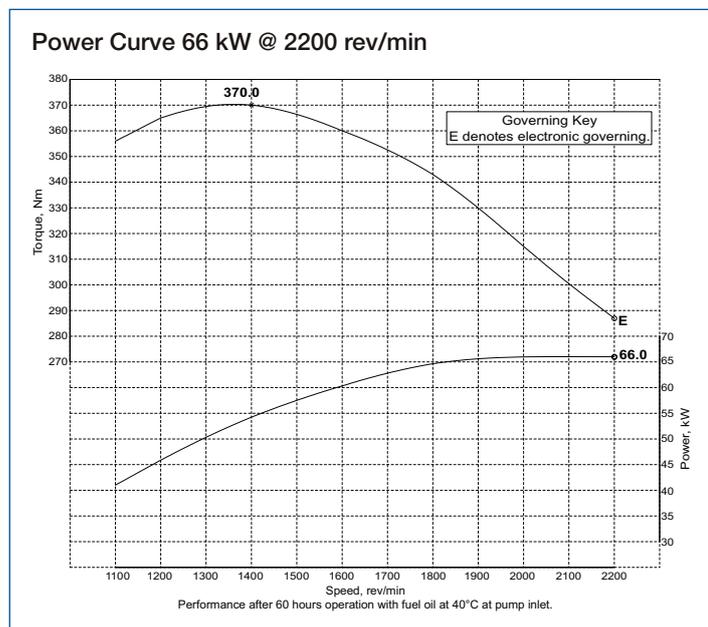

Maximum Rating (kW)	Speed (rev/min)	Torque (Nm)	Speed (rev/min)
66	2200	370	1400
75	2200	420	1400

Rating Standard ISO 14396:2002
Unless otherwise specified, all stated data is for maximum rated speed and 100% load.

Rating definitions and conditions

IND-C (Intermittent) is the horsepower and speed capability of the engine where maximum power and/or speed are cyclic (time at full load not to exceed 50%).

Additional ratings are available for specific customer requirements. Consult your Perkins distributor.


Rating Conditions for Diesel Engines – up to 7.1 litres are based on ISO/TR14396, inlet air standard conditions with a total barometric pressure of 100 kPa (29.5 in. Hg), with a vapour pressure of 1 kPa (0.295 in Hg) and 25°C (77°F). Performance is measured using fuel to specification EPA 2D 89.330-96 with a density of 0.845-0.850 kg/L @ 15°C (59°F) and fuel inlet temperature 40°C (104°F).

850 Series 854E-E34TA Industrial Open Power Unit

EU Stage IIIB, EPA Tier 4 Interim
66-74.5 kW / 88-100 hp

Aftertreatment configuration

Wall flow

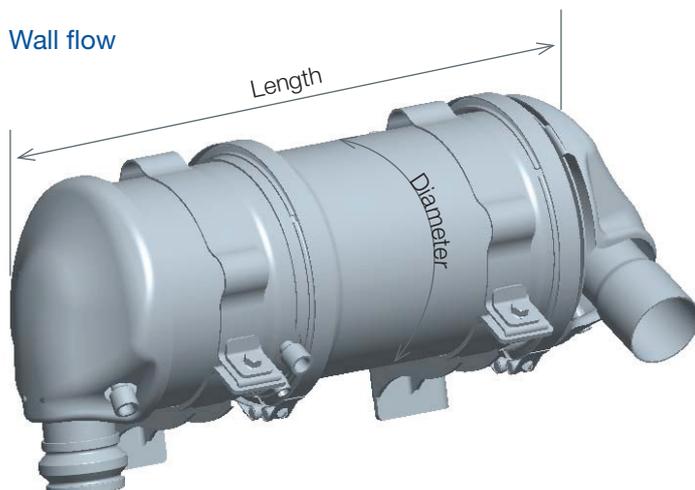

Aftertreatment Type	Length	Diameter of Can	Weight
Wall Flow	541 mm (21.3 in)	180 mm (7.1 in)	20 kg (44 lbs)

Final weight and dimensions will depend on completed specification

Technology

The Diesel Particulate Filter (DPF) technology chosen performs through the whole work cycle of the engine thus allowing it to work efficiently without interruption.

Power

Using our advanced research and development techniques, we have perfectly matched the aftertreatment to the engine. The engine performance has then been optimised to give the maximum power and the emissions module is invisible to the operator in most duty cycles.

Mounting

Multiple on engine installation options provide OEMs with simple and flexible solutions for many applications.

Service

Minimum 3,000 hour DPF ash service intervals.

Aftertreatment

The diesel particulate filter on its own cannot remove all the legislated gases. Hydrocarbons, carbon monoxide and the 'soluble organic fraction' must also be managed. The Diesel Oxidation Catalyst (DOC) is a silicon carbide material but uses a through flow principle. The gases pass straight through the device rather than through the walls.

For particulate reduction Perkins is offering:

- A silicon carbide wall flow DPF. This porous ceramic material is highly efficient at removing particulate matter – 90% as a minimum – and often much higher.

Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.
Publication No. PN1986/09/12 Produced in England
©2012 Perkins Engines Company Limited

Perkins Engines Company Limited

Peterborough PE1 5FQ
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240

www.perkins.com



THE HEART OF EVERY GREAT MACHINE